

xTAB 7x Quad Tablet PC

User's manual





TABLE OF CONTENTS

TABLE OF CONTENTS	2
INTRODUCTION	3
I - GETTING STARTED	3
Important Safety Precautions	
Cleaning the Panel	
Cleaning the Tablet	
Features	
Buttons Overview	
Accessories	
What's in the Box	
Charging the Battery	
Power on/off and Unlock the tablet	5
II - FUNCTIONNING OF THE TABLET	е
Navigation	6
Home Screen	
Application Launcher Screen	6
Status Bar	
Onscreen Keyboard	7
III - SETTINGS	8
Set Up Wi-Fi Connection	c
Set Op WI-FI Connection	
Set Up Email	
Set Up Calendar	
Create Shortcuts or Widgets on Home Screen	
Change Wallpapers	
Use folders	11
IV - CONNECTIONS	12
Wi-Fi	
PC Connection	
V – APPLICATIONS	
Camera	
To take picture	
To record video	
ClockBrowser	
Calculator	
Downloads	
Gallery	
Music	
Movie Player	
FM radio	
Phone Calls	20
Making calls	20
Call Menu	20
Emergency Calls	20
Call log	21
Sending Messages	
SIM management	21
VI - PRODUCT SPECIFICATION	22

INTRODUCTION

First of all, thank you very much for purchasing WayteQ product!

Please read this manual carefully before using this product.

This company will continue to provide new functions for the development of the product, and there will be no separate change in the case of any change in the product's performance and functions.

If the actual setup and the application methods are not identical to those as set forth in this manual, please access to the latest product information of our web site.

I - GETTING STARTED

Important Safety Precautions

Always follow these basic safety precautions when using your tablet. This will reduce the risk of fire, electric shock and injury.

Warning: To reduce the risk of fire of shock hazard, do not expose this product to rain or water.

Warning: To prevent the risk of electric shock, do not remove the cover. There are no user-serviceable parts inside. Opening will void your warranty.

- Unplug the tablet before performing maintenance.
- Keep your tablet out of direct sunlight and heat sources.
- Protect the power cord. Route power cords so that they are not likely to be walked on or pinched by items placed on or against them. Pay particular attention to the point where the power cord is attached to the tablet.
- Only use the AC adapter included with the tablet. Using any other power adapter will void your warranty.
- Unplug the power cord from the outlet when the unit is not in charging condition.

Cleaning the Panel

Treat the screen gently. The screen is made of glass and can be scratched or broken.

To clean fingerprints or dust from the screen, it is recommended to use a soft, non-abrasive cloth such as a camera lens cloth to clean the screen.

If you use a commercial Cleaning Kit, do not apply the cleaning liquid directly to the screen. Clean the screen with cleaning cloth moistened with the liquid.

Cleaning the Tablet


Clean the outer surface of the tablet (excluding the screen) with a soft cloth dampened with water.

Features

The tablet includes these key features:


- Displays Alarm, Browser, Calculator, Calendar, Camera, Clock, Email, File Browser, Gallery, Music, Setting, Movie Player and etc
- Displays digital photos, Play Music and Video
- Wi-Fi function to connect with your AP router for internet browsing
- GPS receiver
- Micro Secure Digital™ (micro SD) slot for external storage
- SIM and Mciro SIM slot
- Capacitive touch screen for all user operations
- 4 GB Internal Memory
- USB2.0 OTG for connection to the PC or USB flash drive

Buttons Overview

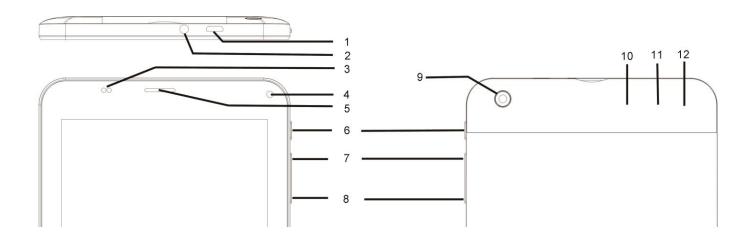


- 1. Micro USB, 2. Earphone, 3. Light sensor / Proximity sensor, 4. Front camera, 5. Speaker, 6. Power, 7. Volume +,
- 8. Volume -, 9. Back camera, 10. Micro SD, 11. SIM card, 12. Micro SIM card

Accessories







USB Cable

What's in the Box

WayteQ xTAB 7x Tablet PC AC Power Adapter (5V/2A) USB Cable, OTG adapter Quick Start Guide

Charging the Battery

Plug the AC power adapter into tablet and into a wall outlet.

Icon will turn to icon while the battery is charging.

* It is strongly recommended you fully charge the device for about 4-6 hours before use. * When charging battery, the battery indicator for a fully charged battery is a steady blue battery icon on the notification bar. It icon means the battery is still being charged, even when 100% has been displayed for battery level on the Settings About tablet > Status screen.

Power on/off and Unlock the tablet

The tablet is easy to set up. Just follow these steps:

- 1. To power: Press and hold Power button for 2 second.
- 2. To unlock: Wait until a screen with a lock icon shows up, gently tap the "Lock" icon and slide it toward the unlock icon.
- 3. To power off: Press and hold the Power button for 2 seconds until "Power off" window pops up on screen where you can choose OK option to power off the device.

Note: The screen with the lock icon will time out in 10 seconds if you do not unlock it. In case it happens, the Power button 0 can be pressed briefly to make it show up again.

II - FUNCTIONNING OF THE TABLET

Navigation

Tablet has five home screens by default. The first time you turn on the tablet or after having factory data reset, you will see a navigation screen.

- * To see all you applications, touch ...
- * You can put your favorite applications on Home screen.

Home Screen



A typical Home screen with wallpaper, status bar, and few applications at the bottom.

- * The background wallpaper may be different from model to model
- ◆ Q Google A shortcut to Google search
- A shortcut to application Launcher screen.

Application Launcher Screen

A typical application Launcher screen is shown below. One icon represents one application which can be run by tapping on the icon.



^{*}The screen icon may be different from model to model

Status Bar

At the bottom and top of the screen, the status bars mainly indicates Back icon, Home icon, Recent viewed applications icon, Current time, Wi-Fi status, 3G status, Bluetooth status and battery level, etc.




Icon	Action
\hookrightarrow	On any functional screen, tap this icon to go back one screen or exit
	application.
	On any functional screen, tap this icon to go to Home screen
	Shows a list of thumbnail images of applications you've work with
	recently. To open an application, touch it. To remove a thumbnail from
	the list, swipe it left or right.
[0]	Screenshot
8:27	Current time
Ş	Wi-Fi connection and signal strength
*	Battery level. Will turn orange when battery is low and turn red when
	battery is very low.
111	SIM card and GSM signal strength

Onscreen Keyboard

The onscreen keyboard appears automatically anytime you tap on a text line for input. While entering text with the onscreen keyboard, each character will be entered into the position pointed by a vertical cursor. You can change the cursor position by tapping with your finger on the position you want to enter the next character. To select different language keyboard, touch and hold icon . A pop menu will show up to let you select the "Input Options"



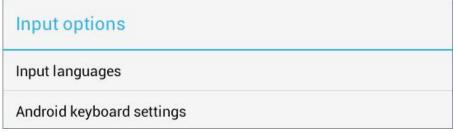

^{*}Setting up an International keyboard: see "Install Third-Part Application" section.

III - SETTINGS

Set Up Wi-Fi Connection



Make Wi-Fi Connection In Settings → Wireless & networks → Wi-Fi, slide the Wi-Fi switch to the I position.




Normally, the device will automatically scan the available Wi-Fi Access Point (AP). If this does not happen, select **Scan** (upper right corner) to scan for the available Wi-Fi APs. Then, tap on the desired AP to make the connection. If it is a secured AP, system will prompt you for the password. Enter it by tapping on the password entry line, and use the onscreen keyboard to enter the password. Then, tap on the Connect to start connecting to that AP. When connection is established, the Wi-Fi connected icon will show up on the status bar.

Set Date and Time



Use Settings → Data & Time to open up the data/time setting screen as shown below. Select the correct time zone. If the Wi-Fi is connected to Internet, check on the Automatic to have time set up automatically. If Wi-Fi is not connected to Internet, uncheck **Automatic date & time** to temporarily set date and time. Then, check Automatic again before leaving the screen. In the future, when the Wi-Fi is connected to internet, date and time will be automatically adjusted.





Set Up Email



You can configure Email for most accounts in just a few steps. For many popular email services, tablet automatically enters most of the settings for you.

- 1. Make sure the Wi-Fi is connected.
- 2. Open the Email application and enter your Email address and password, then tap "Next"
- 3. Give a name to your account then tap "Next". Mail messages will be downloaded automatically.

Icon	Action	
<u> </u>	Tap to enter E-mail compose interface	
Q	Tap to enter search interface of Inbox	
C	Refresh	
	Tap to enter Account settings. To remove your account record	
-	in tablet, tap Remove account	

Set Up Calendar



Calendar makes you easy to stay on schedule. You can view your schedule in day/week/month/and agenda mode by touching icons at upper left corner. Swipe to scroll vertically or horizontally.

When using calendar for the first time, there are some steps you shall follow:

- 1. Tap Calendar icon into Gmail entering interface, then enter your Gmail account and password and tap Next.
- 2. Change the Serve "gmail.com" for "m.google.com", then tap **Next** step.
- 3. You can tap on the specific date to start using your personal calendar now.

Icons across the top:

Icon	Action
February 13, 2012	Tap to see the viewing type: day/week/month/and agenda
TODAY	Tap to view today's schedule
	Tap to show the creating events interface
	Tap to show more options: Refresh/Search/Settings

Create Shortcuts or Widgets on Home Screen

In order to access to frequently used applications / widgets more quickly, you can create a short cut to an application / widget and place it on the Home screen. Therefore, you don't need to spend to look for it among the many applications / widgets on the Launcher screen.

Shortcuts

Press the application icon in the Launcher screen and hold until the icon is enlarged and background has been changed to Home screen. Then drag the enlarged icon to an empty space on Home screen and release the finger.

Widgets

Widget is a small application. After being installed, it shows up in the main Widgets screen.


To add widgets: Touch and hold a widget, drag it to an empty space on Home screen and release your finger.

To remove shortcut / widget: Tap and hold any icon / widget on Home screen, then drag it into the **Remove** icon.

* If there is not enough room to drop it, the icon / widget won't get added to the Home screen.

Change Wallpapers

Tap any blank space on Home screen and hold until a **Choose wallpaper from** menu pops out. Then, you can select wallpaper from your Gallery / Live wallpapers / Wallpapers.

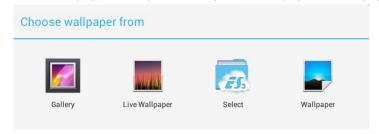

Use folders



You can combine several applications' icon in a folder by dropping one icon over another on a Home screen. From any Home screen, you can:

Open a folder by a slight touch.

Rename a folder by touching its name.

Move icons around your Home screens: Touch, hold, and then slide.

IV - CONNECTIONS

Wi-Fi

This tablet uses the 802.11b/g/n wireless specification to transmit and receive data. For more information, refer to "Set up Wi-Fi Connection" on page 8.

PC Connection

Connect your tablet to a PC via USB cable. By connecting tablet to PC, you can synchronies files or transfer data directly.

- 1. Plug one end of a USB cable to a tablet and plug the other end to a PC. Drag down the upper status bar at the left top corner. Choose USB connected. Tap Turn on USB storage to connect to PC.
- 2. For a better use of your tablet, tap Turn off USB storage every time you unmount USB storage.

V – APPLICATIONS

Camera



Tablet allows you to take photos and video through the cameras. To change from front and rear camera tap



To take picture

Tap on the shutter button to take a picture.

To record video

to start video recording. To stop recording tap Tap on the Recording button

Tap to open the settings.

Clock




After tapping on clock icon in Launcher screen, the following screen will be shown. Tap on icon into alarm setting interface.



Browser



Browser is used for browsing the World Wide Web. With the web browser plug-ins, you could browse websites to watch videos, download contents, and listen to music etc.

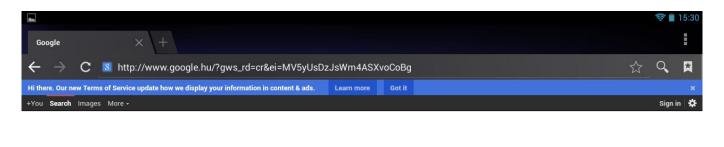



- 1. Tap the address field (in the title bar) to bring up the onscreen keyboard, enter website address, then tap Go.
- 2. Similar website previously browsed or key work previous searched will appear beneath the address field. You can tap them to go to the web site listed or search the key word.
- 3. Double tap on screen to zoom in and zoom out. Moving fingers across the screen will pan the screen up, down, left or right.

Tap Menu button at the right-upper corner to display additional functions at the bottom of the screen.

Calculator



To perform mathematical calculation directly on tablet by tap numbers and symbols.



Downloads



Files, applications and other items you download from Browser or Email will be stored in your micro SD card. Use the Downloads application to view, reopen or delete what you've downloaded.

- 1. Touch an item in Downloads can reopen it.
- 2. Check items you want to share, and then tap icon to choose a sharing method from the list.
- 3. Check items you want to delete; then tap delete icon. The item will be deleted from your micro SD card.
- 4. In **Downloads** window \rightarrow Tap **Sort by size** or **Sort by date** to switch back and forth.

Gallery



Tap on "Gallery" in Launcher screen to open the application.


- 1. The first screen shows all photos and subfolders as albums.
- 2. Tap on a picture or album into photo thumbnail mode. (Default view)
- 3. Tap a thumbnail into photo single view mode.
- 4. When in photo single view mode, tap anywhere on screen to show function bar on screen.

Icon	Action
<,	Share photos by Google/Bluetooth/Email
i	Go to more options: Delete/Slideshow/Rotate left/ Rotate right/ Crop photo/ Details/Set picture as

Music



Tap "Music" in the application launcher screen to get to the song screen as below:

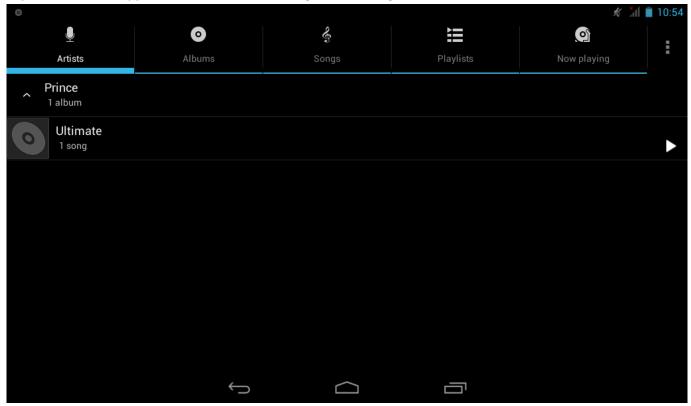

Select the **Artists/Albums/songs** or **playlists** mode to play music. Use the onscreen icons to configure how you want to play the songs.

Icon	Action
<u>=</u>	Show playing list
ズ	Turn shuffle on/off function
\$ / 🕶	Repeating all songs, current song or Off
K	Previous song
Ш	Pause/ Stop
	Next song

Note: Song will keep playing as background music while you leave the music playback screen. This function allows you to browse files, view photos and surf Internet while listening to music. To stop playing songs, tap on Pause on the music playing screen followed by the Back button.

Tap on status bar to select other functions to play the song.

Movie Player



- 1. Tap "Video" in the application launcher screen.
- 2. Browse the video file to play from the list.
- 3. Tap video to start play.

To search in video, simply drag white bar below video. To display controls tap video, to hide controls again tap video again.


Icon	Action
	Play / pause
J	Select sound track
8	More options: Stop, Loop
×	Full screen

FM radio



Tap "FM radió" icon in application launcer screen. The screen below appears:



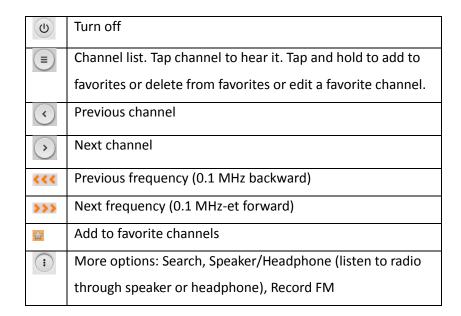

Functions for FM recording

Start record
Stop record. Give a name for the recording and save it
Playback recording

Tap Back button to exit FM recording.

Phone Calls



The "SIM2" slot is for micro SIM card while the "SIM1" slot is for standard sized SIM card (WCDMA/GSM).

<u>Notice:</u> You can refer to the reception icon in the status bar to see if the service is available, or how good the reception is. The number of the bars in the icon illustrate the reception quality, the more the better.

Making calls

Use the phonebook/dialer to make phone calls. You can make a call by directly selecting a contact from the phonebook or go into the contact detail screen. Below are the illustration of related icons:

C	Dialer	(Call Log
9	Phonebook	abtă n	Display Similar Contact
■ X	Backspace		Dialer Screen
\triangle	No Reception	#	Hide the Dialer
:	Settings: Select "fast dial", "phonebook" or "call settings		






Call Menu

Touch to answer a phone call. If you are wearing a headset, you can press the

button on the headset to answer. Touch or press the power button to reject a phone call. If you are wearing a headset, you can press and hold the button to reject. When you are not available for answering a phone call, you can drag the ring upward to the message button, and the phone will automatically send a message to the number of the incoming call.



Emergency Calls

If you are within the service range of GSM mobile network, you should be able to make emergency calls, even if there isn't any SIM card in your phone.

Call log

L	Incoming Call Missed	7	Calls Successfully Made
V	Incoming Call Answered	i	Touch to delete call records or go to call settings
Q,	Search for Contact	Ç	Touch to make fast call

<u>Notice:</u> You can see the numbers or the contacts' names of missed incoming calls by opening the notification panel or the dialer. Other operations: touch a call record to make a phone call, or save as a new contact, or send a short message, or make a video call, or delete it from the call log.



Sending Messages

You can send or receive text messages while you are within the service areas. You can also choose to send multimedia messages to anyone with a phone number. To manage messages tap icon.

SIM management

Go to Settings -> SIM management to set working parameters of SIM cards. When using two SIM cards at the same time after tapping call icon in call log or dialer, you can choose which SIM card you want to use for the call in the appearing menu.

VI - Product Specification

Aspect Ratio 1 Resolution 1 CPU N OS A	I'' IPS, 5 points capacitive touch panel .6:9 .024 x 600 MTK8382 Quad-core Cortex-A9 1,3 GHz Android 4.2.2 . GB	
Resolution 1 CPU N OS A	.024 x 600 MTK8382 Quad-core Cortex-A9 1,3 GHz Android 4.2.2	
CPU NOS A	MTK8382 Quad-core Cortex-A9 1,3 GHz Android 4.2.2	
OS A	Android 4.2.2	
	. GB	
Storage	. GB	
Internal memory 1		
NAND Flash 8	3 GB	
External SD card	Micro SD up to 32GB	
Connectivity		
WIFI 8	302.11 b/g/n	
Bluetooth 4	1.0	
GPS B	Built in	
Camera 0	0.3 Mega pixel front / 2.0 Mega pixel rear	
SIM slot	Normal and Micro SIM	
USB OTG U	USB OTG 2.0 x 1	
Stereo Speaker B	Built-in	
Microphone B	Built-in	
Earphone 3	3.5mm Stereo Jack	
Sensor		
Accelerometer Y	'es	
User Interface		
Hardware Keys	Power, Vol+, Vol-	
Virtual F	ull Touch Screen /Virtual keyboard	
Extras		
FM radio B	Built in	
Dimension/Weight/Condition		
Dimension 1	190 x 110 x 10.3 mm	
Weight 2	75g	
Operation Condition 0	0°C∼40°C	
Storage Condition -2	20°C∼55°C	
Power		
Battery L	i-Polymer Rechargeable 3,7V, 2700mAh	
AC/DC Adapter 1	.00Vac~240Vac,0.5A, 50Hz-60Hz, 5V/2A	